




America's Choice for Boat Lifts


PILING SETTINGS FOR 16K 4-PILING LIFT

TOP BEAMS: 12' 6" OUTSIDE-TO-OUTSIDE OF PILINGS

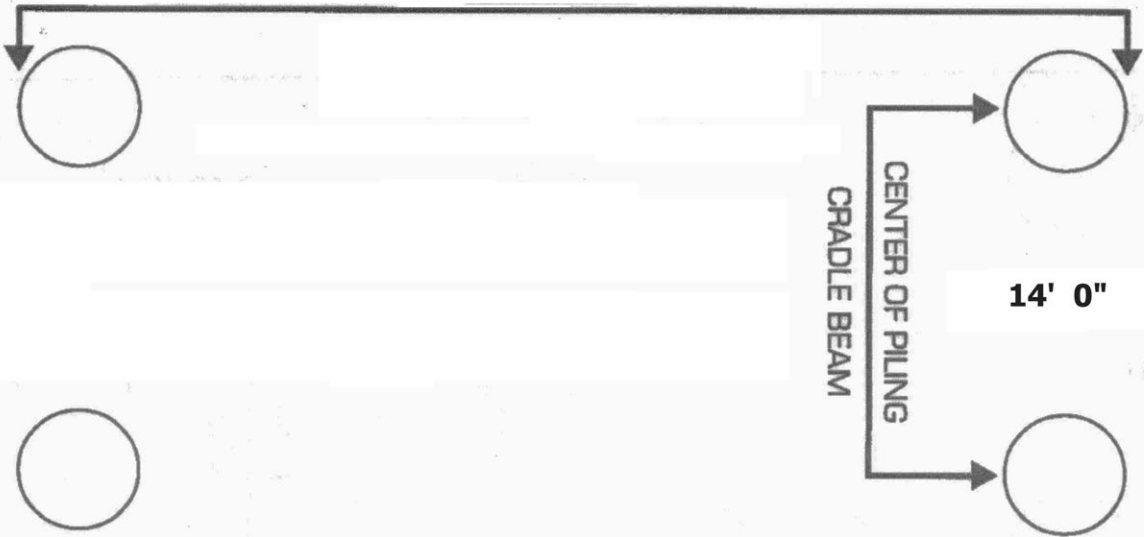

PILING SETTINGS FOR 16K 6-PILING LIFT

TOP BEAMS: 15' 0" OUTSIDE-TO-OUTSIDE OF PILINGS

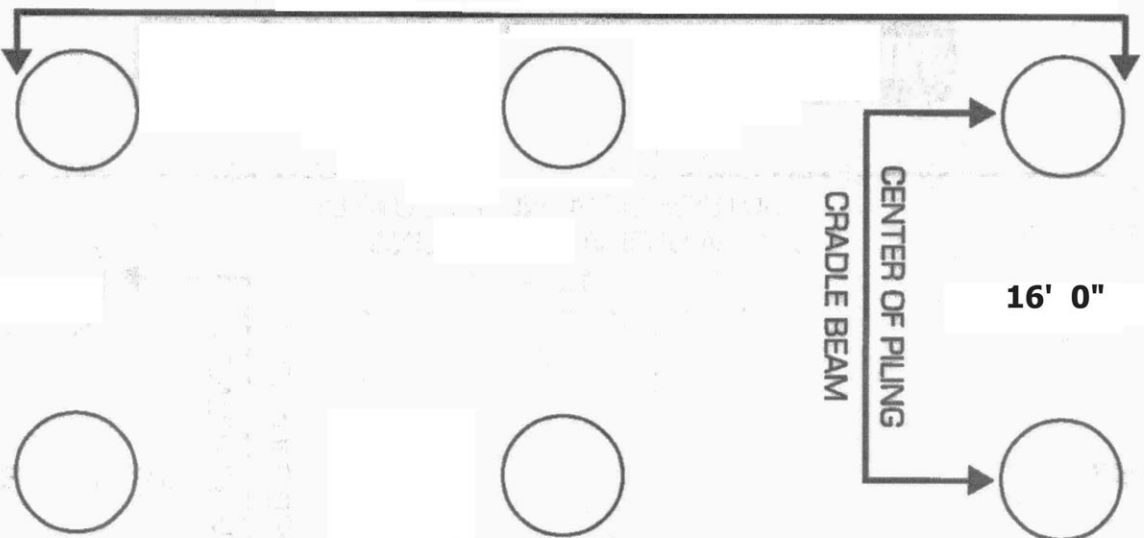

IMPORTANT: Vessel weight **MUST** be balanced equally at each of the four lift cables.
Move vessel forward/aft, and port to starboard as needed to achieve even weight distribution.